


<b>Product reference:</b>	475 ACU
<b>Series:</b>	No Sound
<b>Description:</b>	Silicone seal with nylon push button (pre-fitted screws)

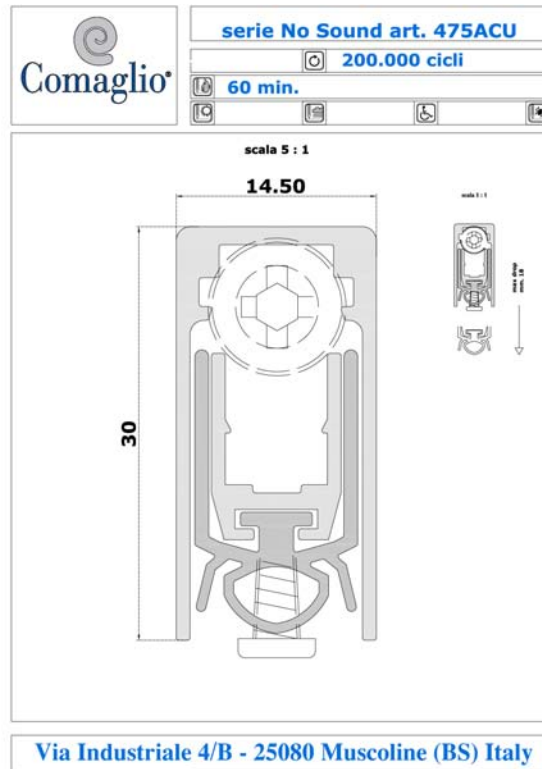

<b>Scope:</b>	Approved for use with 60 minute fire resisting timber based doorsets meeting the criteria in section 4 of assessment referenced: BMT/CNA/F15244
<b>Minimum door leaf thickness:</b>	54mm
<b>Fitting requirements:</b>	The drop down seal is to be rebated centrally in the bottom of the door leaf
<b>Intumescent Protection:</b>	10 x 2mm uncased STS graphite seals must be fitted either side of the drop down seal in the bottom of the door leaf. The perimeter intumescent specification for the door design must be fitted in the frame reveal and not the leaf edge i.e. it is not permitted for the drop seal to interrupt the perimeter intumescent seals around the leaf
<b>Supporting test evidence:</b>	BMT/FEP/F15130

*The legal validity of this report can only be claimed on presentation of the complete report*